




Product catalog

“

**AVS RÖMER, YOUR SPECIALIST
FOR CUSTOMIZED SOLUTIONS!**



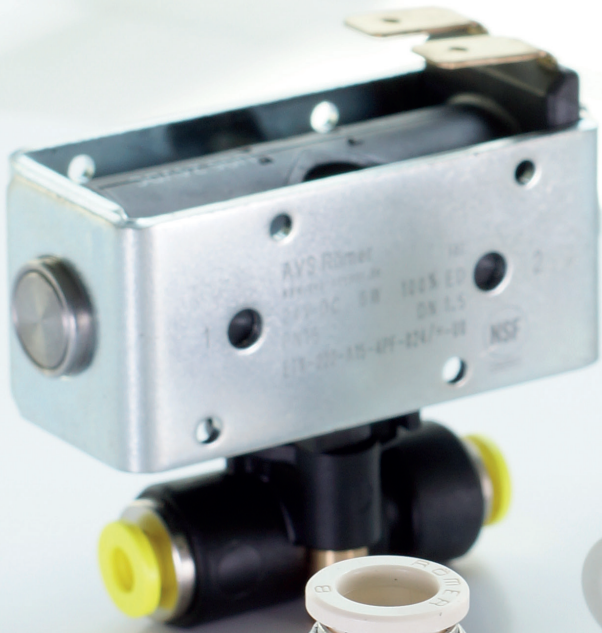


2/2-Way Solenoid Valve - Type EAV Series 200

 Price group **51**


"A" normally closed NC

Brass


Version	DN	Kv-value water [m³/h]	QnN-value air [l/min]	G	PN	Sealing material	Type	Order number	Price
without manual override for all AC and DC coils	1.2	0.05	50	M5	40/16	NBR	EAV-211-A12-M05BK-00	605001	o. r.
	1.2	0.05	50	M5	40/16	FKM	EAV-211-A12-M05FK-00	605002	o. r.
	1.2	0.05	50	G 1/8	40/16	NBR	EAV-211-A12-1/8BK-00	605003	o. r.
	1.2	0.05	50	G 1/8	40/16	FKM	EAV-211-A12-1/8FK-00	605004	o. r.
	1.5	0.06	68	M5	32/6	NBR	EAV-211-A15-M05BK-00	605007	o. r.
	1.5	0.06	68	M5	32/6	FKM	EAV-211-A15-M05FK-00	605008	o. r.
	1.5	0.06	68	G 1/8	32/6	NBR	EAV-211-A15-1/8BK-00	605009	o. r.
	1.5	0.06	68	G 1/8	32/6	FKM	EAV-211-A15-1/8FK-00	605010	o. r.
	1.8	0.11	125	M5	32/6	NBR	EAV-211-A18-M05BK-00	605013	o. r.
	1.8	0.11	125	M5	32/6	FKM	EAV-211-A18-M05FK-00	605014	o. r.
	1.8	0.11	125	G 1/8	32/6	NBR	EAV-211-A18-1/8BK-00	605015	o. r.
	1.8	0.11	125	G 1/8	32/6	FKM	EAV-211-A18-1/8FK-00	605016	o. r.
	2	0.12	145	M5	25/4	NBR	EAV-211-A20-M05BK-00	605019	o. r.
	2	0.12	145	M5	25/4	FKM	EAV-211-A20-M05FK-00	605020	o. r.
	2	0.12	145	G 1/8	25/4	NBR	EAV-211-A20-1/8BK-00	605021	o. r.
	2	0.12	145	G 1/8	25/4	FKM	EAV-211-A20-1/8FK-00	605022	o. r.
	2	0.12	145	G 1/4	25/4	NBR	EAV-211-A20-1/4BK-00	605023	o. r.
	2	0.12	145	G 1/4	25/4	FKM	EAV-211-A20-1/4FK-00	605024	o. r.
	2.2	0.13	165	M5	16/3	NBR	EAV-211-A22-M05BK-00	605025	o. r.
	2.2	0.13	165	M5	16/3	FKM	EAV-211-A22-M05FK-00	605026	o. r.
2.2	0.13	165	G 1/8	16/3	NBR	EAV-211-A22-1/8BK-00	605027	o. r.	
2.2	0.13	165	G 1/8	16/3	FKM	EAV-211-A22-1/8FK-00	605028	o. r.	
2.2	0.13	165	G 1/4	16/3	NBR	EAV-211-A22-1/4BK-00	605029	o. r.	
2.2	0.13	165	G 1/4	16/3	FKM	EAV-211-A22-1/4FK-00	605030	o. r.	
3	0.21	210	G 1/8	10/2	NBR	EAV-211-A30-1/8BK-00	605031	o. r.	
3	0.21	210	G 1/8	10/2	FKM	EAV-211-A30-1/8FK-00	605032	o. r.	
3	0.21	210	G 1/4	10/2	NBR	EAV-211-A30-1/4BK-00	605033	o. r.	
3	0.21	210	G 1/4	10/2	FKM	EAV-211-A30-1/4FK-00	605034	o. r.	
without manual override for all DC coils	1.2	0.05	50	M5	40/12.5	NBR	EAV-213-A12-M05BK-00	605051	o. r.
	1.2	0.05	50	M5	40/12.5	FKM	EAV-213-A12-M05FK-00	605052	o. r.
	1.2	0.05	50	G 1/8	40/12.5	NBR	EAV-213-A12-1/8BK-00	605053	o. r.
	1.2	0.05	50	G 1/8	40/12.5	FKM	EAV-213-A12-1/8FK-00	605054	o. r.
	1.5	0.06	68	M5	32/6	NBR	EAV-213-A15-M05BK-00	605057	o. r.
	1.5	0.06	68	M5	32/6	FKM	EAV-213-A15-M05FK-00	605058	o. r.
	1.5	0.06	68	G 1/8	32/6	NBR	EAV-213-A15-1/8BK-00	605059	o. r.
	1.5	0.06	68	G 1/8	32/6	FKM	EAV-213-A15-1/8FK-00	605060	o. r.
	1.8	0.11	125	M5	25/5	NBR	EAV-213-A18-M05BK-00	605063	o. r.
	1.8	0.11	125	M5	25/5	FKM	EAV-213-A18-M05FK-00	605064	o. r.
	1.8	0.11	125	G 1/8	25/5	NBR	EAV-213-A18-1/8BK-00	605065	o. r.
	1.8	0.11	125	G 1/8	25/5	FKM	EAV-213-A18-1/8FK-00	605066	o. r.
	2	0.12	145	M5	16/4	NBR	EAV-213-A20-M05BK-00	605069	o. r.
	2	0.12	145	M5	16/4	FKM	EAV-213-A20-M05FK-00	605070	o. r.
	2	0.12	145	G 1/8	16/4	NBR	EAV-213-A20-1/8BK-00	605071	o. r.
	2	0.12	145	G 1/8	16/4	FKM	EAV-213-A20-1/8FK-00	605072	o. r.
	2	0.12	145	G 1/4	16/4	NBR	EAV-213-A20-1/4BK-00	605073	o. r.
	2	0.12	145	G 1/4	16/4	FKM	EAV-213-A20-1/4FK-00	605074	o. r.
	2.2	0.13	165	M5	16/3	NBR	EAV-213-A22-M05BK-00	605075	o. r.
	2.2	0.13	165	M5	16/3	FKM	EAV-213-A22-M05FK-00	605076	o. r.
2.2	0.13	165	G 1/8	16/3	NBR	EAV-213-A22-1/8BK-00	605077	o. r.	
2.2	0.13	165	G 1/8	16/3	FKM	EAV-213-A22-1/8FK-00	605078	o. r.	
2.2	0.13	165	G 1/4	16/3	NBR	EAV-213-A22-1/4BK-00	605079	o. r.	
2.2	0.13	165	G 1/4	16/3	FKM	EAV-213-A22-1/4FK-00	605080	o. r.	
3	0.21	210	G 1/8	10/2	NBR	EAV-213-A30-1/8BK-00	605081	o. r.	
3	0.21	210	G 1/8	10/2	FKM	EAV-213-A30-1/8FK-00	605082	o. r.	
3	0.21	210	G 1/4	10/2	NBR	EAV-213-A30-1/4BK-00	605083	o. r.	
3	0.21	210	G 1/4	10/2	FKM	EAV-213-A30-1/4FK-00	605084	o. r.	
with manual override for all AC and DC coils	1.5	0.06	68	M5	12.5/6	NBR	EAV-221-A15-M05BK-00	605207	o. r.
	1.5	0.06	68	M5	12.5/6	FKM	EAV-221-A15-M05FK-00	605208	o. r.
	1.5	0.06	68	G 1/8	12.5/6	NBR	EAV-221-A15-1/8BK-00	605209	o. r.
	1.5	0.06	68	G 1/8	12.5/6	FKM	EAV-221-A15-1/8FK-00	605210	o. r.
	2	0.12	145	G 1/8	12.5/4	NBR	EAV-221-A20-1/8BK-00	605221	o. r.
	2	0.12	145	G 1/8	12.5/4	FKM	EAV-221-A20-1/8FK-00	605222	o. r.
	2	0.12	145	G 1/4	12.5/4	NBR	EAV-221-A20-1/4BK-00	605223	o. r.
	2	0.12	145	G 1/4	12.5/4	FKM	EAV-221-A20-1/4FK-00	605224	o. r.
	3	0.21	210	G 1/8	10/2	NBR	EAV-221-A30-1/8BK-00	605231	o. r.
	3	0.21	210	G 1/8	10/2	FKM	EAV-221-A30-1/8FK-00	605232	o. r.
3	0.21	210	G 1/4	10/2	NBR	EAV-221-A30-1/4BK-00	605233	o. r.	
3	0.21	210	G 1/4	10/2	FKM	EAV-221-A30-1/4FK-00	605234	o. r.	

Illustration


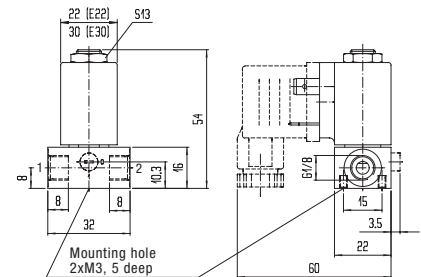
Normal position




Operational position

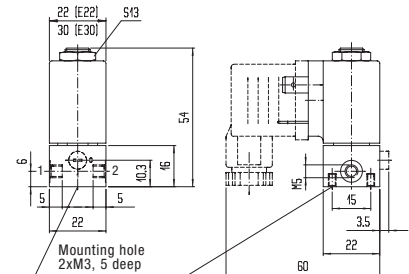

Version with M5 Ports




Version with G 1/8 Port

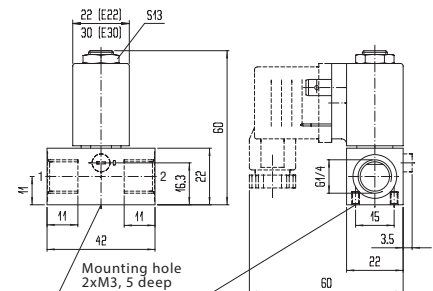

Version with G 1/4 Port


10,500

products and variants through **modular design**,
different configurations and **custom solutions**

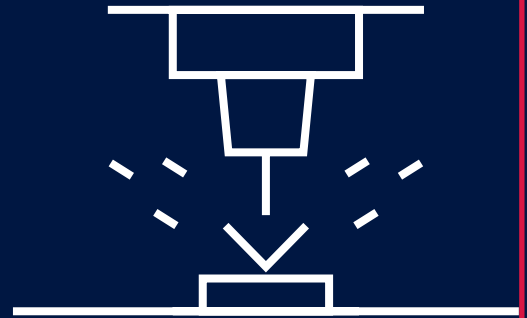

○ Since 1970

Successful family business for over **50 years**

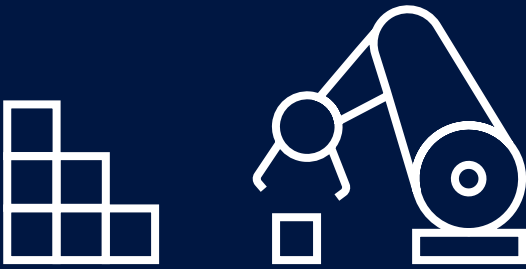

From 1 to 1,000,000

Flexibility in the number of pieces

○ 14 %

of the electricity demand is
generated with **our own PV system**





Worldwide

International customers from the market segments
Food & Beverage, Industrial, Life Science

J. C. Römer Foundation since **2012**
to promote young technical talent

3 core values

The Römer family


We live cohesion and trust

Customer orientation

We are committed to quality and service

Down-to-earth self-confidence

We stand by our word

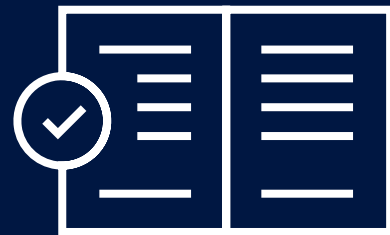

3,500

Catalog products with variants

3 locations

Grafenau, Langenberg and Switzerland



Shipping to
different countries

48

Certifications and approvals

AVS Römer Quality and Environmental Management

Our ISO certifications confirm the sustainable environmental policy and the high quality at AVS Römer. The implemented management systems according to ISO 9001:2015 and ISO 14001:2015 ensure an improvement process, which continuously expands the high standard at our company.



Product approvals

For numerous applications, compliance with certain safety standards is necessary. Among other things, this requires a high degree of cleanliness as well as special design guidelines and materials. A large number of our products meet these stringent requirements.



Product and material conformity

AVS Römer products are particularly well-suited for use in various areas due to their compliance with certain guidelines and standards. Further conformities, approvals and certifications on request.



**MADE IN
GERMANY**

AVS Römer GmbH & Co. KG
Reismühle 3
94481 Grafenau
Germany

AVS G. Roemer Schweiz AG
Heidelbergstrasse 9
8355 Aadorf
Switzerland

DE GB US

Phone: +49 8552 4076 300
E-Mail: info@avs-roemer.de
www.avs-roemer.de

CH ES BE FR IT

Phone: +41 32 377 22 11
E-Mail: info@avs-roemer.ch
www.avs-roemer.ch


FSC
www.fsc.org
MIX
Paper from
responsible sources
FSC® C114687

